

# REGULATOR RG180 LN3/4XM20/150 PO.150MBAR 10KG/H UPSO (MANUAL), OPSO (MANUAL)

**CODE 700008** 

With an inlet pressure between 1 and 6bar, the regulator maintains the outlet pressure between 140 and 160mbar for flow rates between 1 and 10kg/h.

#### **FEATURES**

Inlet pressure: 1-6bar

Output pressure: 140-160mbar

 Securities: UPSO (100mbar) manual reset, OPSO (300mbar) manual reset

Nominal flow rate: 10kg/h

Pressure tapping: -


Connections: LN3/4xM20/150

Disposition: 180°

Conduction for venting: -



### **DIMENSIONS**

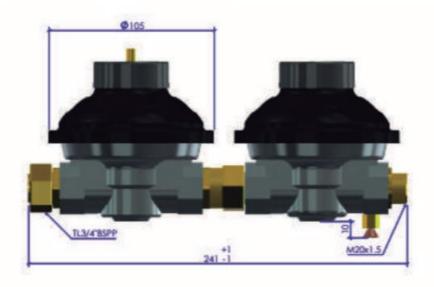





#### **MATERIALS**

- Membranes and seals, in NBR resistant to Liquefied Petroleum Gas (LPG), Natural Gas (NG) and Synthetic Natural Gas (SNG)
- Aluminum body
- Galvanized steel cover
- Cataphoresis treatment with high resistance on cover and body

- Galvanized steel springs
- Non-metallic internal parts, in PA with fiberglass and acetal resin (POM)
- Stainless steel filter
- Manufactured in the EU

#### **COMPLIANCE WITH STANDARDS**



AENOR certificate in accordance with the UNE 60402-1 (2008) standard



CE-certified according to 88-1:2011 + A1:2016, EN 13611:2019 and EN13611:2019/AC:2021

#### INSTALLATION AND COMMISSIONING


- Check the inlet pressure. It must not exceed 6 bar.
- Fit the regulator respecting the gas flow. See flow arrow on the bottom of the regulator.
- Once the regulator is in place, check that there are no leaks at the regulator connections.
- With all consumption points downstream of the regulator closed, open the gas tap upstream of the regulator.
- If the regulator is fitted with automatic VIS MIN, wait a few seconds (approx. 15-20) until the VIS is reset.

- In the case of manual VIS MIN, operate the reset device on the controller (by pulling on it) for about 2 seconds.
- Once VIS MIN has been reset, act on the VIS MAX reset device (located on the second body) for about 2 seconds.
- The regulator will start to regulate when any consumption demand occurs.




## **BEHAVIOURAL CURVES**



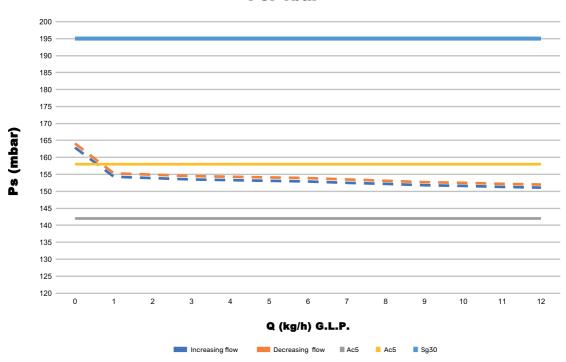

#### Pe: 2,5bar

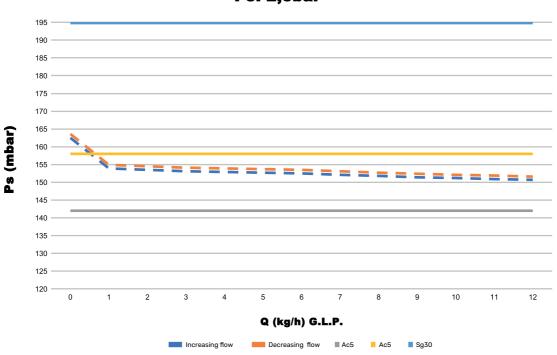



## **BEHAVIOURAL CURVES**

